


## Gearbox


Make	FULLER			ZF
Model	RT-11509C	7JS100A	9JS180	S6-90
Compatible Engine	WD615.71 WD615.67 WD615.77 WD615.68 WD615.78 WD615.46	WD615.61	WD615.42	WD615.61
Description	Single Lever Operation; Twin Countershaft; Pneumatic Assisted H/L range; Dog Clutch Selector;			All gears with synchronizer
Number of Speeds	9 forwards 1 reverse	7 forwards 1 reverse	9 forwards 1 reverse	6 forwards 1 reverse
Ratio of Speeds	12.2/8.26/6.08/ 4.53/3.36/2.47/ 1.81/1.35/1.00 12.99 r	8.03/5.32/ 3.36/2.54/ 1.58/1.00/0.756 8.00 r	12.65/8.38/6..22/ 4.57/3.40/2.46/ 1.83/1.34/1.00 12.23 r	9.01/5.24/ 3.22/2.20/ 1.50/1.00 8.30 r

## V- BELT

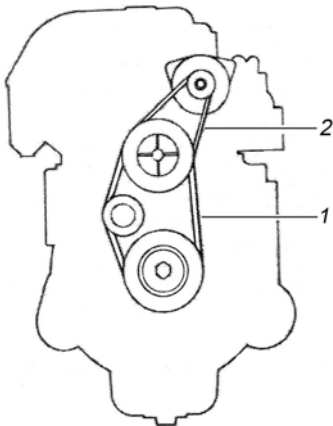

### Standard:

1. Fan Belt:	
WD615.61	2- 12.5(AV13)X1100
WD615.71	1- 12.5(AV13)X1100
WD615.64	2- 12.5(AV13)X1075
WD615.74/77	1- 12.5(AV13)X1125
WD615.67/68	2- 12.5(AV13)X1125
WD615.46	2- 12.5(AV13)X1150
WD615.42	2- 12.5(AV13)X1125
2. Alternator Belt	
	2- 9.5 (AV10)X 800

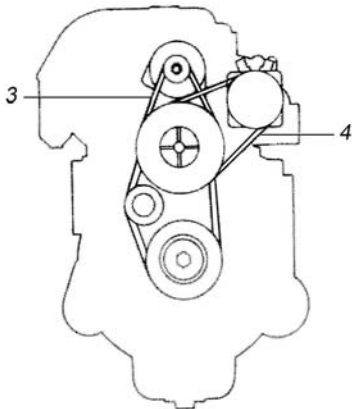

### With A/C compressor belt

3. Alternator Belt	2-9.5(AV10)X775 open flank
4. A/C compressor belt	1-12.5(AV13)X1025 open flank